



The University of Bradford Institutional Repository

<http://bradscholars.brad.ac.uk>

This work is made available online in accordance with publisher policies. Please refer to the repository record for this item and our Policy Document available from the repository home page for further information.

To see the final version of this work please visit the publisher's website. Access to the published online version may require a subscription.

Link to publisher version: <https://doi.org/10.22055/jacm.2017.21494.1103>

Citation: Oguntala M and Abd-Alhameed RA (2017) Haar Wavelet Collocation Method for Thermal Analysis of Porous Fin with Temperature-dependent Thermal Conductivity and Internal Heat Generation. *Journal of Applied and Computational Mechanics*. 3(3): 185-191.

Copyright statement: © 2017 Shahid Chamran University of Ahvaz. Full-text reproduced in accordance with the publisher's self-archiving policy.

Haar Wavelet Collocation Method for Thermal Analysis of Porous Fin with Temperature-dependent Thermal Conductivity and Internal Heat Generation

George Oguntala and Raed Abd-Alhameed

Faculty of Engineering and Informatics, Department of Electrical Engineering and Computer Science, University of Bradford
Bradford, West Yorkshire, BD7 1DP, UK, g.a.oguntala@bradford.ac.uk

Abstract

In this study, the thermal performance analysis of porous fin with temperature-dependent thermal conductivity and internal heat generation is carried out using Haar wavelet collocation method. The effects of various parameters on the thermal characteristics of the porous fin are investigated. It is found that as the porosity increases, the rate of heat transfer from the fin increases and the thermal performance of the

Accepted for publication March 20 2017.

Corresponding author: George Oguntala, g.a.oguntala@bradford.ac.uk

porous fin increases. The numerical solutions by the Haar wavelet collocation method are in good agreement with the standard numerical solutions.

Keywords: Haar Wavelet method; Porous fin; Thermal Analysis; Temperature-dependent; Thermal Conductivity; Internal Heat Generation.

1. Introduction

In recent times, the study into thermal analysis in porous fin has experienced significant research, following the pioneer work on heat transfer enhancement through porous fin by (Kiwani and Al-Nimr [1]). In solving for the nonlinearity arising from heat transfer analysis in porous fin, Kiwani [1-4], and Golar and Baker [5] applied Runge-Kutta for the thermal analysis in porous fin. Kundu [6-9] and Taklifi *et al.* [10] applied the Adomian decomposition method (ADM) on the performance and optimum design analysis of the fins while Saedodin and Sadeghi [11], Darvishi *et al.* [12] and Moradi *et al.* [13] and Ha *et al.* [14] adopted the homotopy analysis method (HAM) to provide solution to the natural convection and radiation in porous and porous moving fins. Hatami and Ganji [15] applied the least square method (LSM) to study the thermal behaviour of convective-radiative in porous fin with different sections and ceramic materials. Hoshyar *et al.* [16] used Homotopy perturbation method and collocation method for the thermal performance analysis of porous fins with temperature-dependent heat generation. Also, Rostamiyaan *et al.* [17] applied variational iterative method (VIM) to provide analytical solution for heat transfer in porous fin. Ghasemi *et al.* [18] used the differential transformation method (DTM) for analysing heat transfer in porous and solid fin. Most of these approximate methods give accurate predictions only when the nonlinearities are weak or for small values of the fin thermo-geometric parameter. However, these methods often fail to predict accurate solutions for strong nonlinear models. Moreover, these approximate methods often involve complex mathematical analysis leading to analytic expression involving a large number terms. In addition, in practice, approximate analytical solutions with large number of terms are not convenient for use by designers and engineers, since they require high computational cost and time in analysing the nonlinear problem. It is in view of these issues that led to the adoption of different wavelet collocation methods for solving different nonlinear equations. The ease of application, simplicity and fast rate of convergence have in recent times made these methods gained popularity in nonlinear analysis of systems and they have been applied to nonlinear problems in heat transfer analysis of fins [19-24]. In the class of the wavelets, the relative simplicity, high accuracy and conveniences, have made Haar wavelet method an interesting and effective tool for solving linear and nonlinear differential equations.

Thus, in this paper, we applied the Haar wavelet collocation method (HWCM) to numerically study the thermal analysis of porous fin with temperature-dependent thermal conductivity and internal heat generation. The numerical solutions are used to investigate the effects of various parameters on the thermal behaviour of the fin.

2. Problem Formulation

Fig. 1 shows a straight porous fin of length L and thickness t exposed on both faces to a convective environment at temperature T_∞ . Assuming the porous medium is homogeneous, isotropic and saturated with a single-phase fluid,

the physical properties of solid as well as fluid are considered as constant except density variation of liquid, which may affect the buoyancy term where Boussinesq approximation is employed. The fluid and porous mediums are in locally thermodynamic equilibrium in the domain, surface radiative transfers and non-Darcian effects are negligible, the temperature variation inside the fin is one-dimensional i.e. temperature varies along the length only and remain constant with time and there is no thermal contact resistance at the fins base and the fin tip is adiabatic type.

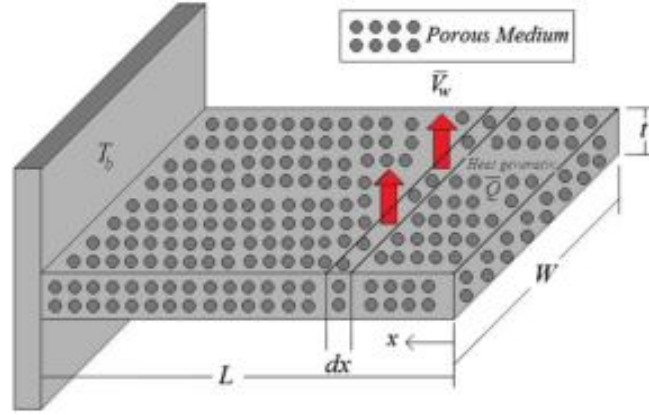


Fig. 1. Schematic of the longitudinal porous fin geometry with the internal heat generation

Using Darcy's model and its assumptions, the governing equation for the heat transfer in the fin is given as

$$\frac{d}{dx} \left[k_{eff}(T) \frac{dT}{dx} \right] - \frac{h(T - T_\infty)}{t} - \frac{\rho c_p g \beta' K (T - T_\infty)^2}{t v_f} + q_a(T) = 0 \quad (1)$$

The boundary conditions are:

$$\begin{aligned} x = L, \quad T &= T_b \\ x = 0, \quad \frac{dT}{dx} &= 0 \end{aligned} \quad (2)$$

The temperature-dependent thermal conductivity and internal heat generation are given by

$$k_{eff}(T) = k_a [1 + \lambda(T - T_\infty)] \quad (3)$$

$$q_{int}(T) = q_a [1 + \psi(T - T_\infty)] \quad (4)$$

Upon substituting eqns. (3) and (4) into eqn. (1), we arrived

$$\frac{d}{dx} \left[[1 + \lambda(T - T_\infty)] \frac{dT}{dx} \right] - \frac{h(T - T_\infty)}{k_a t} - \frac{\rho c_p g K \beta' (T - T_\infty)^2}{k_a t v_f} + \frac{q_a}{k_a} [1 + \psi(T - T_\infty)] = 0 \quad (5)$$

The dimensionless form of eqn. (5) can be developed if we use the following dimensionless parameters in eqn. (6)

$$X = \frac{x}{L}, \quad \theta = \frac{T - T_\infty}{T_b - T_\infty}, \quad Ra = \left(\frac{\beta' g T_b t^3}{\nu_f^2} \right) \left(\frac{\rho c_p \nu_f}{k_{eff,a}} \right), \quad Q = \frac{q \nu_f t}{\rho c_p \beta' g K (T_b - T_\infty)^2}, \quad M^2 = \frac{h L^2}{k_{eff,a} t}, \quad Da = \frac{K}{t^2},$$

$$S_h = \frac{Ra Da (L/t)^2}{k_{eff,a}}, \quad \gamma = \psi (T_b - T_\infty), \quad \beta = \lambda (T_b - T_\infty)$$

The dimensionless governing differential Eq. (7) and the boundary conditions

$$\frac{d^2 \theta}{dX^2} + \beta \theta \frac{d^2 \theta}{dX^2} + \beta \left(\frac{d\theta}{dX} \right)^2 - M^2 \theta - S_h \theta^2 + S_h Q (1 + \gamma \theta) = 0 \quad (6)$$

(7)

The boundary conditions are:

$$X = 1, \quad \theta = 1$$

$$X = 0, \quad \frac{d\theta}{dX} = 0$$

(8)

3. Solution Procedure

It is very difficult to develop a closed-form solution for the above non-linear eq. (7). Therefore, recourse should be made to either approximation analytical method, semi-numerical method or numerical method of solution. In this work, Haar wavelet collocation is used. The procedures are given below.

Let $M = 2^j$ (J is the maximum level of resolution); the i^{th} wavelet is defined as;

$$h_i(x) = \begin{cases} 1, & \text{for } x \in [\alpha, \xi), \\ -1, & \text{for } x \in [\xi, \gamma) \\ 0, & \text{elsewhere} \end{cases} \quad i = 2, \dots, 2M$$

(9)

where $\alpha = \frac{k}{2^j}$, $\xi = \frac{k+0.5}{2^j}$, and $\gamma = \frac{k+1}{2^j}$. Here $k = 0, 1, \dots, 2^j - 1$ is the translation parameter and $j = 0, 1, \dots, J$ is the dilatation parameter. The number of wavelets is given by $i = 2^j + k + 1$ and the maximum value is $i = 2M$.

For $i = 1$, it is assumed that;

$$h_1(x) = \begin{cases} 1, & \text{for } x \in [0, 1). \\ 0, & \text{elsewhere} \end{cases}$$

(10)

Introducing the following notations;

$$p_{i,1}(x) = \int_0^x h_i(x') dx',$$

(11)

$$p_{i,v+1}(x) = \int_0^x p_{i,v}(x') dx', \quad i = 2, 3, \dots$$

(12)

The above integrals can be evaluated using Eq. (9) and are given by;

$$p_{i,1}(x) = \begin{cases} x - \alpha & \text{for } x \in [\alpha, \xi), \\ \gamma - x & \text{for } x \in [\xi, \gamma), \\ 0 & \text{elsewhere} \end{cases}$$

(13)

$$p_{i,2}(x) = \begin{cases} \frac{1}{2}(x-\alpha)^2 & \text{for } x \in [\alpha, \xi), \\ \frac{1}{2^{2j+2}} - \frac{1}{2}(\gamma-x)^2 & \text{for } x \in [\xi, \gamma), \\ \frac{1}{2^{2j+2}} & \text{for } x \in [\gamma, 1), \\ 0 & \text{elsewhere} \end{cases} \quad (14)$$

Also, it is assumed that;

$$C_{i,1} = \int_0^1 p_{i,1}(x') dx'. \quad (15)$$

The collocation points are defined as:

$$X_j = \frac{j-0.5}{2M}, \quad j = 1, 2, \dots, 2M \quad (16)$$

Re-writing eqn. (7) as:

$$\theta'' = f(X, \theta, \theta'). \quad (17)$$

The Haar wavelet collocation method for the above nonlinear problem subject to the conditions is given as follows:

$$\theta(0) = \lambda_1, \quad \theta'(1) = \lambda_2 \quad (18)$$

Also, it is assumed that;

$$\theta''(X) = \sum_{i=1}^{2M} a_i h_i(X). \quad (19)$$

Integrating Eq. (19) from 0 to X, the derivative $\theta'(X)$ can be expressed as:

$$\theta'(X) = \theta'(0) + \sum_{i=1}^{2M} a_i p_{i,1}(X). \quad (20)$$

Putting $X=1$ in eqn. (20) and using the second boundary condition, the value of $\theta'(0) = \lambda_2 - a_1$. Thus, eqn. (20) can then be re-written as:

$$\theta'(X) = \lambda_2 - a_1 + \sum_{i=1}^{2M} a_i p_{i,1}(X). \quad (21)$$

Now, again integrating eqn. (21) from 0 to X and using the first boundary condition;

$$\theta(X) = \lambda_1 + (\lambda_2 - a_1)X + \sum_{i=1}^{2M} a_i p_{i,2}(X) \quad (22)$$

Eqn. (22) is obtained. Substituting the values of $\theta(X)$, $\theta'(X)$ and $\theta''(X)$ in Eq. (17) and applying discretization using collocation points given in Eq. (16), a nonlinear system is obtained;

$$\sum_{i=1}^{2M} a_i h_i(X_j) = \left[f(X_j, \lambda_1) + (\lambda_2 - a_1)X_j + \sum_{i=1}^{2M} a_i p_{i,2}(X_j), (\lambda_2 - a_1) + \sum_{i=1}^{2M} a_i p_{i,1}(X_j) \right] \quad (23)$$

Solving the above $2M \times 2M$ system using Newton's method, the unknown Haar coefficient a_i 's, $i = 1, 2, \dots, 2M$ are obtained which are eventually used to find the approximate solution.

4. Result and Discussion

Figs. 2a and b shows the effects of thermal conductivity parameters on the temperature distribution. The figures indicate that as thermal conductivity parameter increases, the dimensionless temperature distribution in the fin decreases.

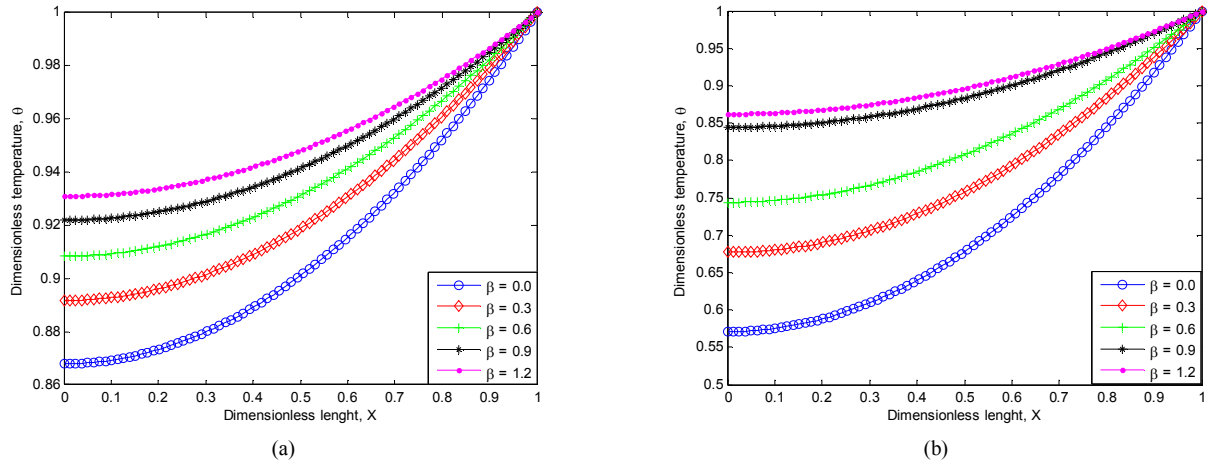


Fig. 2. Dimensionless temperature distribution in the fin parameters for varying thermo-geometric parameter when:
 (a) $S_h=0.5$, $M=0.3$, $Q=0.4$, $\gamma=0.2$ (c) $M=0.8$, $S_h=0.1$, $Q=0.4$, $\gamma=0.2$

Also, Figs. 3a-b show the effects of porosity on the temperature distribution. As the porosity parameter increases, the temperature decreases rapidly and the rate of heat transfer through the fin increases. The increase in the porous parameter, S_h implies increase in the Darcy and Raleigh number of the porous fin and the figures depict that, increase in the porosity of the fin improves fin efficiency due to increase in convection heat transfer.

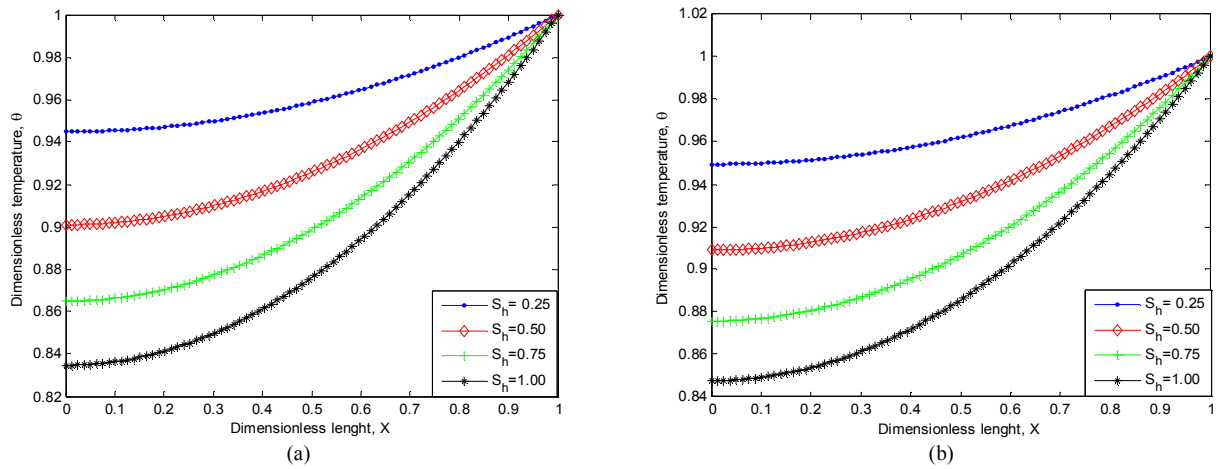


Fig. 3. Dimensionless temperature distribution in the fin parameters for varying thermo-geometric parameter when:
 (a) $\beta=0.4$, $Q=0.3$, $\gamma=0$, (b) $\beta=0.4$, $Q=0.3$, $\gamma=0.2$

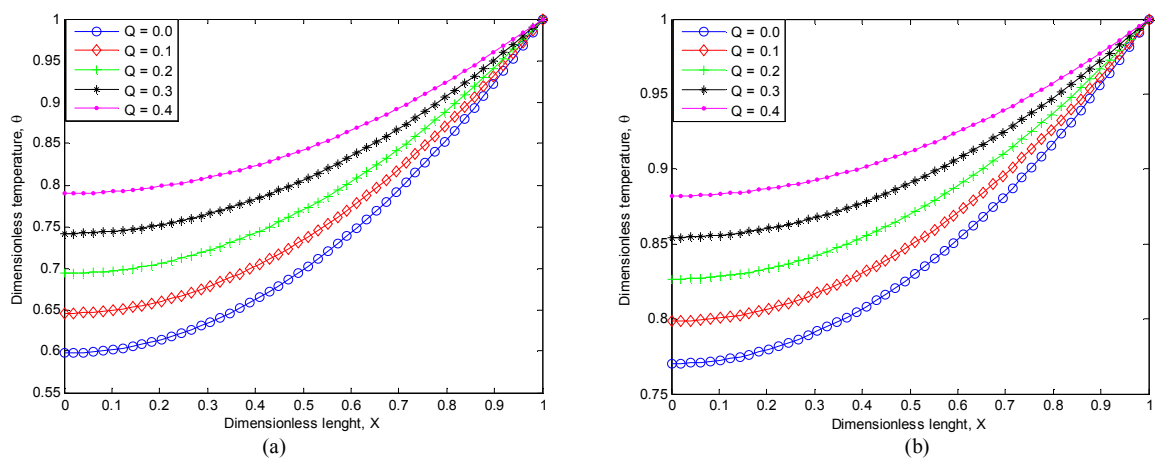


Fig. 4. Dimensionless temperature distribution in the fin parameters for varying thermo-geometric parameter when: (a) $S_h=1$, $\beta=-0.5$, $\gamma=0.2$, (b) $S_h=1$, $\beta=0.5$, $\gamma=0.2$

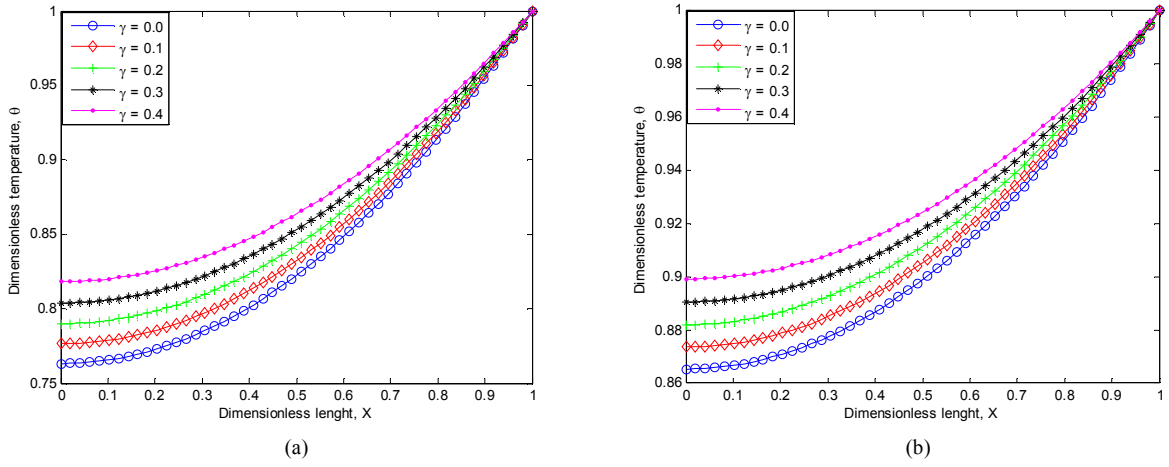


Fig. 5. Dimensionless temperature distribution in the fin parameters for varying thermo-geometric parameter when: (a) $S_h=1$, $\beta=-0.5$, $Q=0.4$, (b) $S_h=1$, $\beta=0.5$, $Q=0.4$

Table 1: Comparison of results

X	NM	HWCRM
0.0	0.9581	0.9571
0.1	0.9585	0.9585
0.2	0.9597	0.9597
0.3	0.9618	0.9618
0.4	0.9647	0.9647
0.5	0.9685	0.9685
0.6	0.9730	0.9730
0.7	0.9785	0.9785
0.8	0.9846	0.9846
0.9	0.9919	0.9919
1.0	1.0000	1.0000

Table 1 shows comparison of results of the numerical solutions by the Haar wavelet collocation method (HWCRM) and with the standard numerical solutions (NM). From the Table, it is shown that excellent agreements are established between the numerical solutions by the Haar wavelet collocation and the standard numerical solutions.

5. Conclusion

In this work, thermal performance of a porous fin with temperature-dependent thermal properties and internal heat generation has been analysed using Haar's wavelet collocation method. The effects of various parameters on the thermal characteristics of the porous fin are investigated. It is found that as the porosity increases, the rate of heat transfer from the fin increases and the thermal performance of the porous fin increases. The numerical solutions by the Haar wavelet collocation method are in good agreement with the standard numerical solutions.

Acknowledgments

The authors wish to thank the editor and all the reviewers for their constructive and insightful suggestions in revising the manuscript.

Nomenclature

h_b	Heat transfer coefficient at the base of the fin [$Wm^{-2}k^{-1}$]	Da	Darcy number
c_p	Specific heat of the fluid passing through porous fin	g	Gravity constant [m/s^2]

	[J/kg-K]		
h	Heat transfer coefficient over the fin surface [W/m ² K]	L	Length of the fin, m
H	Dimensionless heat transfer coefficient at the base of The fin [Wm ⁻² k ⁻¹]	Nu	Nusselt number
k	Thermal conductivity of the fin material [Wm ⁻¹ k ⁻¹]	Ra	Rayleigh number
k_a	Thermal conductivity of the fin material at the base of the fin [Wm ⁻¹ k ⁻¹]	S _h	Porosity parameter
k_{eff}	Effective thermal conductivity ratio	P	Perimeter of the fin
K	Permeability of the porous fin [m ²]	t	Thickness of the fin
M	Dimensionless thermo-geometric parameter	T	Fin temperature [K]
m	Mass flow rate of fluid passing through porous fin [kg/s]	T _a	Ambient temperature K
Q	Dimensionless heat transfer rate per unit area	T _b	Temperature at the base of the fin [K]
Q_b	Dimensionless heat transfer rate the base in porous fin	w	Width of the fin
Q_s	Dimensionless heat transfer rate the base in solid fin	X	Dimensionless length of the fin
v	Average velocity of fluid passing through porous fin [m/s]	x	Axial length measured from fin tip (m)
q_b	Heat transfer rate per unit area at the base [W/m ²]	q	Internal heat generation

Greek Symbols

β	Thermal conductivity parameter or non-linear parameter	δ	Thickness of the fin, m
γ	Dimensionless internal heat generation parameter	δ _b	Fin thickness at its base
θ_b	Dimensionless temperature at the base of the fin	L	Length of the fin, m
β'	coefficient of thermal expansion (K ⁻¹)	θ	Dimensionless temperature
ν	Kinematic viscosity (m ² /s)	ε	Porosity or void ratio

References

- [1] S. Kiwan, A. Al-Nimr. "Using porous fins for heat transfer enhancement". ASME Journal of Heat Transfer 2001; 123:790–5.
- [2] S. Kiwan, "Effect of radiative losses on the heat transfer from Porous fins". International Journal of Thermal Science, Elsevier. 46(2007a)., 1046-1055
- [3] S. Kiwan. "Thermal Analysis of natural convection porous fins". Transport in Porous Media 67(2007b), SpringerLink17-29.
- [4] S. Kiwan, O. Zeitoun, "Natural convection in a horizontal cylindrical annulus using porous fins". International Journal on Numerical Heat Fluid Flow 18 (5) (2008), 618-634.
- [5] R. S. Gorla, A. Y. Bakier. "Thermal analysis of natural convection and radiation in porous fins". International Communication in Heat and Mass Transfer 38(2011), 638-645.
- [6] B. Kundu, D. Bhanji. "An Analytical Prediction for Performance and Optimum Design Analysis of Porous fins". International Journal on Refrigeration 34(2011), 337-352.
- [7] B. Kundu, D. Bhanja, K. S. Lee. "A Model on the basis of Analytics for Computing Maximum Heat Transfer in porous fins". International Journal of Heat and Mass Transfer 55 (25-26) (2012) 7611-7622.
- [8] D. Bhanja, B. Kundu. "Thermal analysis of a constructal T-shaped porous fin with radiation effects". International Journal on Refrigeration, Elsevier Vol. 34(6) 2011 1483–96.
- [9] B. Kundu, "Performance and Optimization Analysis of SRC profile fins subject to simultaneous Heat and Mass Transfer". International Journal of Heat and Mass Transfer 50 (2007) 1545-1558.
- [10] A. Taklifi, C. Aghanajafi, H. Akrami. "The Effect of MHD on a porous fin attached to a vertical isothermal surface". Transp Porous Med. 85(2010) 215–31.
- [11] S. Saedodin, S. Sadeghi, S. "Temperature distribution in long porous fins in natural convection condition". Middle-east Journal of Scientific Research. 13(6) 2013 812-817.
- [12] M. T. Darvishi, R. Gorla, R.S., Khani, F., Aziz, A.-E. "Thermal Performance of a porous radial fin with natural

- convection and radiative heat losses". *Journal of Thermal Science, Elsevier*. 19(2) (2015) 669-678.
- [13] Moradi, A., Hayat, T. and Alsaedi, A. "Convective-radiative thermal analysis of triangular fins with temperature-dependent thermal conductivity by DTM". *Energy Conversion and Management* 77 (2014) 70–77.
- [14] H. Ha, Ganji D. D and Abbasi M. "Determination of Temperature Distribution for Porous Fin with Temperature-Dependent Heat Generation by Homotopy Analysis Method". *Journal of Applied Mechanical Engineering*, Vol. 4(1) (2005).
- [15] M. Hatami, D. D. Ganji. "Thermal Performance of circular convective-radiative porous fins with different section shapes and materials". *Energy Conversion and Management*, 76(2013)185–193.
- [16] H. A. Hoshyar, I. Rahimipetroudi, D. D. Ganji, A. R. Majidian. "Thermal performance of porous fins with temperature-dependent heat generation via Homotopy perturbation method and collocation method". *Journal of Applied Mathematics and Computational Mechanics*. 14(4) (2015), 53-65.
- [17] Y. Rostamiyan, D. D. Ganji, I. R. Petroudi, and M. K. Nejad. "Analytical Investigation of Nonlinear Model Arising in Heat Transfer Through the Porous Fin". *Journal of Thermal Science, Springer*. 18(2) (2014), 409-417.
- [18] S. E. Ghasemi, P. Valipour, M. Hatami, D. D. Ganji. "Heat transfer study on solid and porous convective fins with temperature-dependent heat-generation using efficient analytical method" *Journal of Central South University* 21(2014), 4592–4598.
- [19] S. Singh, D. Kumar and K. N. Rai. "Wavelet Collocation Solution for Convective Radiative Continuously Moving Fin with temperature-dependent Thermal Conductivity". *International Journal of Engineering and Advanced Technology*, 2(4) (2013), 10-16.
- [20] S. Singh, D. Kumar and K. N. Rai. "Convective-radiative fin with temperature-dependent thermal conductivity, heat transfer coefficient and wavelength dependent surface emissivity". *Propulsion and Power Research, Elsevier* 3(4), (2014), 207-221.
- [21] S. Singh, D. Kumar and K. N. Rai. "Wavelet Collocation Solution for Non-linear Fin Problem with Temperature-dependent Thermal Conductivity and Heat Transfer Coefficient". *International Journal of Nonlinear Analysis Application*, 6(1) (2015), 105-118.
- [22] A. S. V. R Kanta, and N. U. Kumar. "A Haar Wavelet Study on Convective Radiative under continuously Moving Fin with temperature-dependent thermal conductivity". *Walailak Journal of Science and Engineering*, 11(3) (2014), 211-224.
- [23] A. S. V. R Kanta, and N. U. Kumar. "Application of the Haar Wavelet Method on a Continuously Moving Convective Radiative Fin with Variable thermal conductivity". *Heat Transfer- Asian Research*, 2013, 1-17.
- [24] I. R. Petroudi, D. D. Ganji, A. B. Shotorban, M. K. Nejad, E. Rahimi, R. Rohollahtabar and F. Taherinia. "Semi-Analytical Method for Solving Nonlinear Equation Arising in Natural Convection Porous fin". *Journal of Thermal Science, Springer* 16(5) (2012), 1303-1308.